



# SUB-WOOFER 18SW2200 18"



The PRV Audio 18SW2200 woofer offers outstanding durability and high power handling.

The surround incorporates a special compound to increase strength and together with the specially designed dual spider suspension assembled with a special resin improving the resistance against failure, offers a smooth accurate geometry during hard play.




The 18SW2200 4" voice coil is larger than found in similar products on the market, coupled with the special cooling system offers great heat dissipation leading to increased life expectancy and accurate response.

The cone was developed and tested with the necessary stiffness to withstand intense use while still offering a smooth, accurate frequency response.

The magnet assembly attached to a sturdy reinforced cast aluminum frame completes the 18SW2200 to ensure a solid support structure, for long lasting play in most any environment.

## TECHNICAL SPECIFICATIONS:

Nominal Diameter.....	18	in
Nominal Impedance.....	8	$\Omega$
RMS Power.....	1100	Wrms
Musical Program Power.....	2200	W
Average Sensitivity between 100Hz and 2,000Hz	97	dB_SPL
Frequency Response.....	35-1,000	Hz
Xmax.....	9	mm
Resonance Frequency .....	34	Hz
Qes: Electrical Quality Factor.....	0.37	
Qms: Mechanical Quality Factor.....	7.2	
Qts: Total Quality Factor.....	.35	
Sd: Cone Area.....	1210	cm <sup>2</sup>
Mms: Mechanical Mass.....	209	g
$\beta$ L Strength Factor.....	25.5	T.m
Voice Coil Electrical Resistance.....	6.2	$\Omega$
Voice Coil Diameter.....	4	in
Net Weight.....	28.6	Lbs
Gross Weight.....	31.7	Lbs
Overall Diameter.....	460/18	mm/in
Hole Cutout Diameter.....	422/16.6	mm/in
Depth.....	209/8.2	mm/in

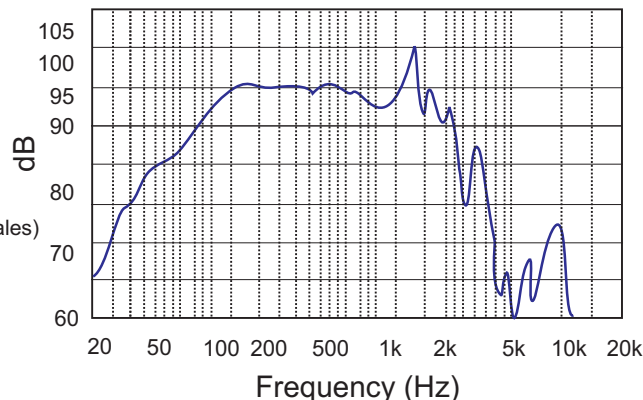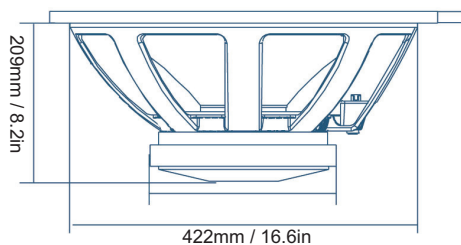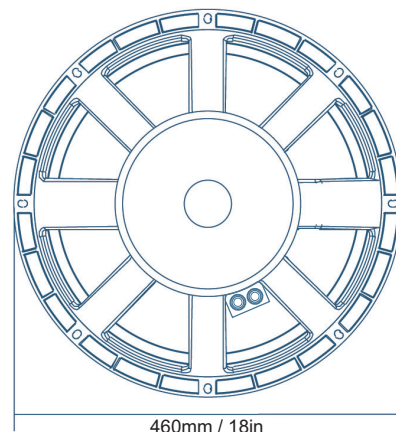

PRV AUDIO USA ( all USA and export sales)  
2000 N.W. 95th Ave  
Miami, FL 33172- USA  
support@prvaudio.com  
http://www.prvaudio.com

PRV AUDIO BRAZIL ( only brazilian sales)  
SAO LEOPOLDO, RS  
+55 51 3566-2626  
vendas@prvaudio.com.br  
http://pvaudio.com.br